

2 Mega FHD Network Bullet camera – WDR IHB120W






Product Features

- Sony Starvis 2MP Image Sensor
- Compress Format:H.264/MJPEG
- Streaming : H.264 & MJPEG
- Support Onvif latest version
- Built in SD micro slot
- Waterproof (IP66)
- POE Cable, (Weatherproof type : option)
- option; 6mm / 8mm / 12mm / 16mm



↑ SD card Slot

Dimensions :

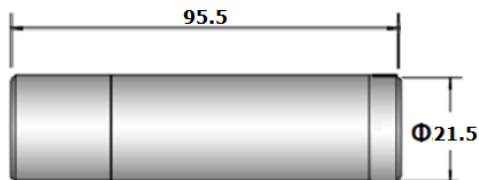

Ring Bracket (option)

SPECIFICATION		
Image	Image Sensor	Sony Starvis 2.07Mega Pixels Image Sensor
	Size	1/2.8 inch
	Scan method	Progressive Scan
	Total Pixels	1945(H) x 1109(V), 2.16 Mega Pixels
	Effective Pixels	1945(H)x 1097(V), 2.13 Mega Pixels
Camera Web Control	Exposure	Auto(1/30~1/30000), (ANTI-SAT_ON / AE SPEED)
		AGC (0~10)
		Sens-up (OFF.x2.x4.x8.x16.x32)
	Low Illumination	0.05Lux / Sen-up :0.005Lux
	Day & Night	AUTO / AUTO-Ext / PRESET / MANUAL
	Backlight Comp.	HLC / BLC
	Motion Detection	OFF / ON
	D N R	2DNR, 3DNR - HDR
	Image adjust.	SHARPNESS/DEFOG/SHADING/PRIVACY
		GAMMMA / MIRROR ,FLIP
	White Balance	Auto(indoor) / Auto(Outdoor) / Push/ User
	Output Set	Real WDR (15fps WDR on / WDR Off)
		3DNR LEVEL (LOW / MIDDLE / HIGH)
System	Camera Title / Language	
Camera RTC	SNTP Enable (ON /OFF)	
Option	uSD Max. Capacity	yes
Lens	Focal Length	3.97mm ± 5% (f=1.6)
	F.O.V.	H87.6° x V46.4° x D104.5°
Physical Spec	Dimension.	Ø21.5 x 95.5
	Bracket Holder	Ring Type : Option
System	OS	Embedded Linux
Network	Interface	RJ45 10/100 Base-T PoE
	Protocol	TCP/IP, UDP/IP, DHCP, AUTO IP, JGMP, ICMP, HTTP, UPnP, FTP, SMTP, SNTP, DNx, RTSP, RTMP
	Onvif	The latest one
	Simultaneous Access	Max. 4 user
	Compress Format	H.264 / MJPEG
	Resolution	1920x1080 (Full HD) / 1920x720 (HD)
		800x600 (SVGA) / 640x480(VGA) / 320x240 (QVGA)
	Max. Frame Rate	H.264 1080p@30fps + VGA@30fps
	Video Streaming	Simultaneously H.264 and MJPEG
		Independent Frame Rate and Bandwidth Control, VBR/CBR Mode
Client Software	Built-in Web,ONVIF(gSOAP,profile S: Spec2.4)	
uSD Card	SDIO 3.0	
Power	Power Input	DC12V, PoE (IEEE802.3af)
	Consumption	DC12V(1.8W)
Operation Temp./Storage Temp.		'-10°C - +50°C / '-20°C - +60°C

Default IP : 192.168.0.150
Camera ID : admin, P/W ; admin

* Specification and Design are subject to change without notice due to product improvement.