

4MP AHD IR Bullet Camera

SINCE 1991
SAMBO
SAMBO HITECH CO.,LTD.

ZNI1240


4MP 1440P AHD Camera



FEATURE

- 1/3" 4 MP CMOS sensor
- 2560X1440P@25fps /@30fps
- 1440P AHD out
(HD Transmission Max.300M)
- 0.1Lux@(F1.2, AGC ON), 0LUX with IR
- 2D-DNR, Day & Night function
- Mega f=3.6MM Fixed Lens
- 24 IR LEDs, IR Range Max. 20M.
- OSD OPTION(OSD CABLE)
- PAL
- IP 67

DIMENSION

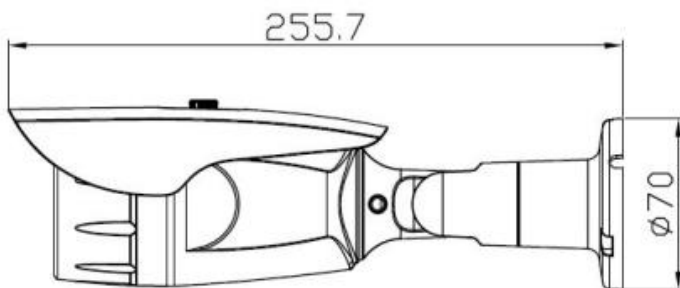

SPECIFICATION		
Device	1/3" 4Megapixel CMOS	
Effective Pixels	2688(H)X1520(V)	
Scanning System	Progressive	
Minimum Illumination	0.1Lux@(F1.2, AGC ON), 0LUX with IR	
Electronic Shutter	AUTO	
	NTSC :1/30 ~1/50.000sec / PAL :1/25 ~1/50.000sec	
S/N Ratio	More than 50dB	
Day and Night	External control(default)/Auto/Color/BW	
Synchronizing Metho	Inter-sync	
Frame Rate	2560X1440P@25fps /@30fps	
Video Output	1440P AHD	
Exposure	Electronic Shutter/Auto Gain Control/Brightness/D-WDR	
Backlight Mode	Off/Backlight Compensation / Strong Light In hibition	
White Balance	Automatic Tracking/AWC-SET/Indoor/Outdoor/Manual	
Noise Reduction	2D-DNR	
Functions	Image mirrot/Dead Pixedl Compensation/Language	
Adjustment	Acuacne/Display Screen/Edge Brightness Compensation/Output Mode	
Exit	Save and Exit/Reset/Not be saved	
Language	CHN(1)/CHN(2)/ENG/GER/FRA/ITA/SPA/POL/RUS	
	/POR/NED/TUR/JAP	
Lens	Focal Length	Mega f=3.6mm Fixed Lens
	Max Aperture	F 2.0
	Angle of View	H:73.1 / V: 41.9
	Mount Type	Board-in
IR LEDs	24 IR LEDs, Max. 20M	
IR Range	Max. 20M	
Power input	DC12V (±20%)	
Power Consumption	IR OFF-1.5W, IR ON-3.5W	
Operation Temp. /Humidity	-10°C - +50°C /10%RH~95%RH	
Storage Temp. /Humidity	-20°C - +60°C / 10%RH~95%RH	
Dimension	Ø67x255.7mm	
Certifications	CE	EMC Directive 2014/30/EU EN 55022:2010 + AC2011 EN 61000-3-2:2014 EN 61000-3-3:2013 EN 50130-4:2011
	FCC	FCC Part 15 Subpart B: 2017
	LVD	Low Voltage Directive : 2014/35/EU EN60950-1: 2006 + 2009 + A1: 2010 + A2 2013
	RoHS	RoHS-3 DIRECTIVE 2011/65/EU , 2015/863/EU

* Specification and Design are subject to change without notice due to product improvement.